

- High performance realized by metal dust core and hot pressing process
- HVAC
-
-
-
-

Technical drawing of a mechanical part showing two dimensions:

- Dimension 1: 2.54 ± 0.25 (indicated by a vertical double-headed arrow on the left side of the part).
- Dimension 2: 1.02 ± 0.3 (indicated by a horizontal double-headed arrow on the right side of the part).

A diagram of a U-shaped object. The total width is labeled as 6.76. The width of the inner opening is labeled as 2.95. The height of the vertical sides is labeled as 2.79. The two vertical sides are shaded with diagonal lines.


Electrical Properties:

Part No	Inductance @ 100KHz/1V	Tolerance	Temperature Rise Current Typ.	Current Typ.	DC Resistance Max.
MDA5030HT-R33M	0.33	±20%	16.7	11.2	5.00
MDA5030HT-R68M	0.68	±20%	11.3	11.7	9.74
MDA5030HT-1R0M	1.00	±20%	10.8	8.0	11.5
MDA5030HT-1R5M	1.50	±20%	8.2	7.1	17.7
MDA5030HT-2R2M	2.20	±20%	7.1	6.3	23.0
MDA5030HT-3R3M	3.30	±20%	5.5	5.5	38.0
MDA5030HT-4R7M	4.70	±20%	4.4	4.5	59.0
MDA5030HT-6R8M	6.80	±20%	3.5	3.5	92.0
MDA5030HT-100M	10.0	±20%	2.8	2.35	129.5





Reel Dimension: [mm]

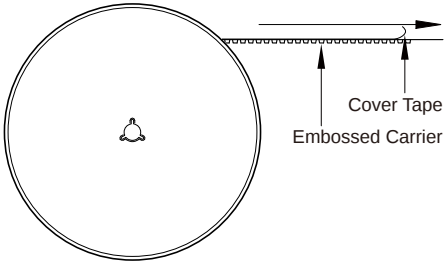

Packaging Quantity: