






Part No	Inductance @ 100KHz/1V (μ H)	Tolerance	Temperature Rise Current Typ. (A)	Satura on Current Typ. (A)	DC Resistance Typ. (m)	DC Resistance Max. (m)

Typical Electrical Characteristics:

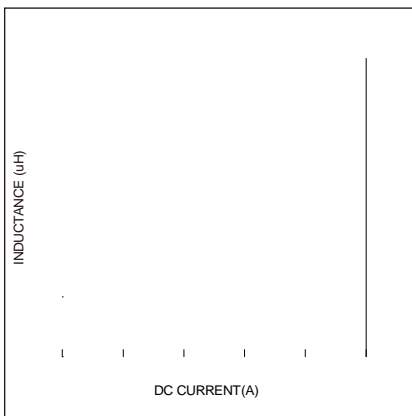

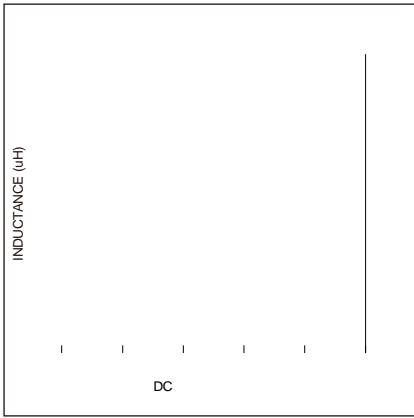

Soldering Reflow:

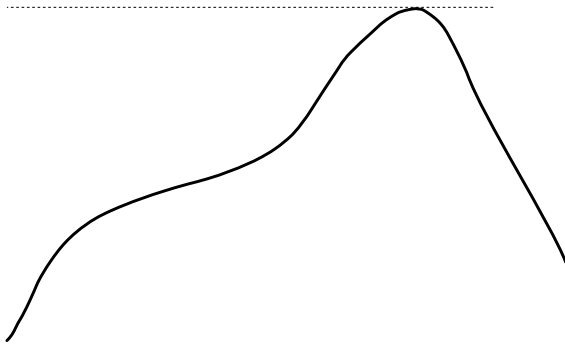

Preheat condition: 150 ~200°C / 60~120 sec.

Allowed time above 217°C : 60~90 sec.


Max temperature: 260°C .

Allowed Reflow time: 2x max.

Packaging Information:

Tape Dimension :


Peel force of top cover tape:

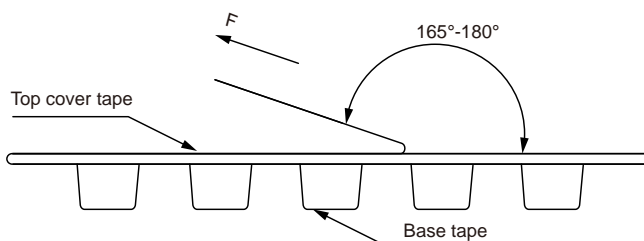


The peel force of top cover tape shall be between 0.1 to 1.3 N

Product Marking:


Marking	K+Printing (Inductance+period)
---------	--------------------------------



Reel Dimension: [mm]

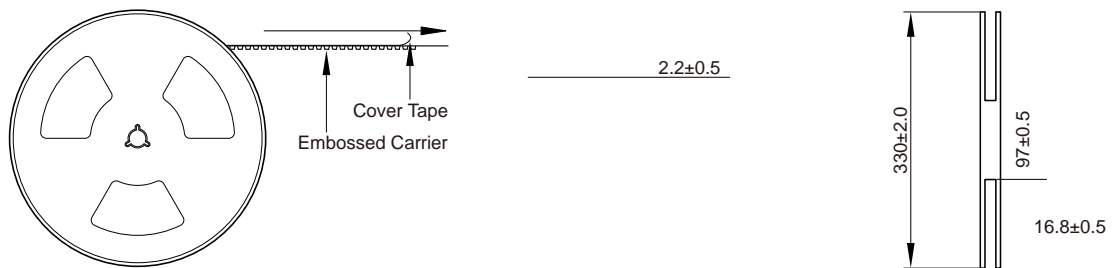

Packaging Quantity:

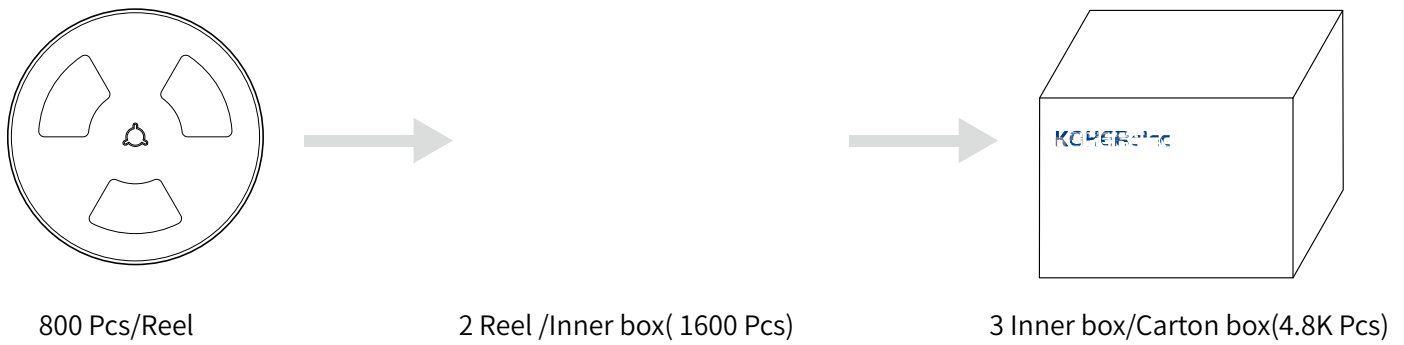

Cautions and Warnings:

Storage Conditions:

Operation Instructions: