



MDTE Series




FEATURES


- {ũ ~ σ tũĩo tĩũ
- Iũ°' 1 ōĩooşũ PũX 5/w 1ũ°' 1 şŸōĩşũōĩ
- 3şoĩ PũX tũĩōĩŕō ōũĩşş tũş şşoĩ PũX Pş t t° ş şĩŕ ōũĩşş
- Iũ°' 1 oşPũ tũPũũĩ
- [ş tş tō Coşş tũş wũ I { ōũşµPũ tũũ
- hµşo tĩũ° ōşşµşo tũĩōş
-

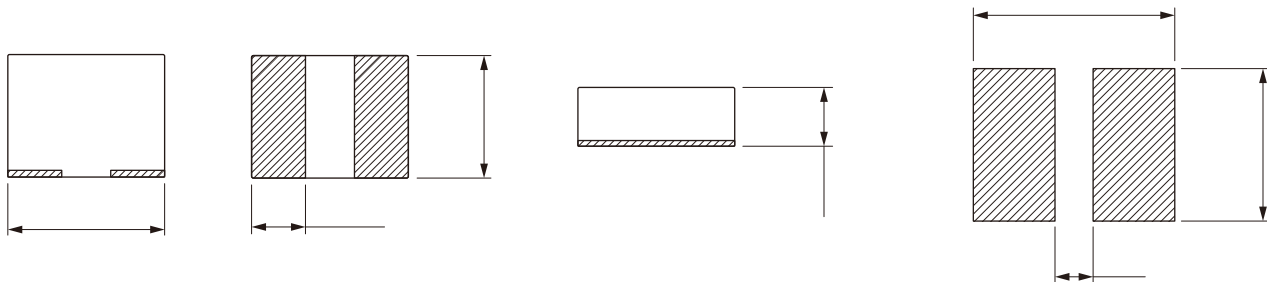


Part No	Inductance @ 1MHz/1V	Tolerance	Current Typ.	Current Max.	Temperature Rise Current Typ.	Temperature Rise Current Max.	DC Resistance Max.
MDTE141208-R33M	0.33	±20%	5.3	5.0	4.0	3.5	28
MDTE141208-R47M	0.47	±20%	4.6	4.2	3.8	3.3	35



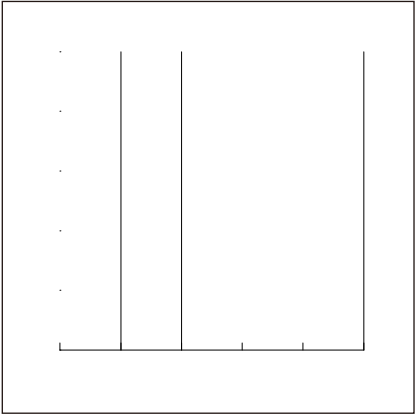

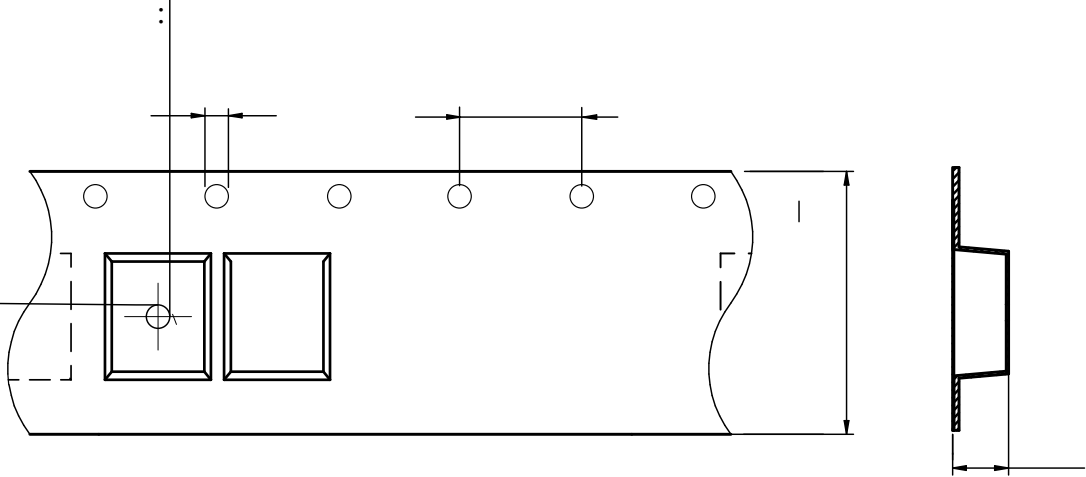

MDTE141208	1.5±0.1	1.7±0.1	1.5±0.1	4.0±0.1	4.0±0.1	8.0±0.1	1.0±0.1	1.75±0.1	0.25±0.05

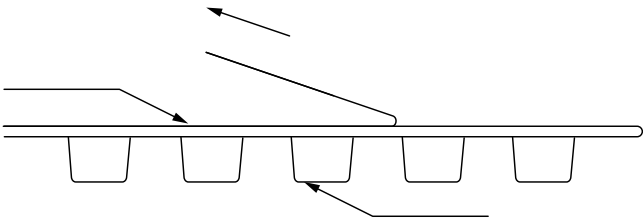

The peel force of top cover tape shall be between 0.1 to 0.98 N

