

NRSE Series

SMD Shielded Tiny Power Inductor

Size 4018


CHARACTERISTICS

- Magnetic resin for higher current and semi-magnetically shielded
- Quantity: 3000pcs


APPLICATION

- DC/DC converter
- LC filter

Dimensions: [mm]

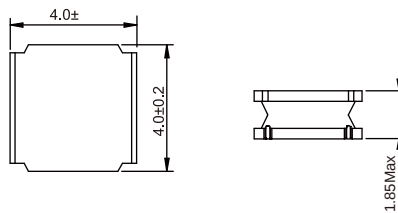

Land Pattern: [mm]



Electrical Properties:

Part No	Inductance @100KHz/0.25V (μ H)	Tolerance	Saturation Current (A)	Temperature Rise Current (A)	DCR $\pm$ 30% (m Ω)
NRSE4018-R56N	0.56	$\pm$ 30%	5.50	3.50	18
NRSE4018-R68N	0.68	$\pm$ 30%	4.90	3.20	18
NRSE4018-1R0N	1.0	$\pm$ 30%	4.50	2.50	23
NRSE4018-1R2N	1.2	$\pm$ 30%	4.30	2.40	28
NRSE4018-1R5N	1.5	$\pm$ 30%	3.35	2.34	33
NRSE4018-1R8N	1.8	$\pm$ 30%	3.00	2.00	44
NRSE4018-2R2M	2.2	$\pm$ 20%	2.70	2.00	44
NRSE4018-3R3M	3.3	$\pm$ 20%	2.45	1.90	70
NRSE4018-4R7M	4.7	$\pm$ 20%	1.70	1.70	90
NRSE4018-5R6M	5.6	$\pm$ 20%	1.60	1.50	103
NRSE4018-6R8M	6.8	$\pm$ 20%	1.45	1.30	124
NRSE4018-8R2M	8.2	$\pm$ 20%	1.40	1.15	180
NRSE4018-100M	10	$\pm$ 20%	1.30	1.10	200
NRSE4018-120M	12	$\pm$ 20%	1.15	0.95	230
NRSE4018-150M	15	$\pm$ 20%	0.94	0.92	268
NRSE4018-180M	18	$\pm$ 20%	0.86	0.85	320

