

WWCI Series

SMD Wire Wound Ceramic Inductor

Size 1008



CHARACTERISTICS


- Wire wound with high Q and high SRF
- More stable due to ceramic design
- Small size and small tolerance available
- Quantity: 2000pcs

APPLICATION

- HF application

Dimensions: [mm]

Land Pattern: [mm]

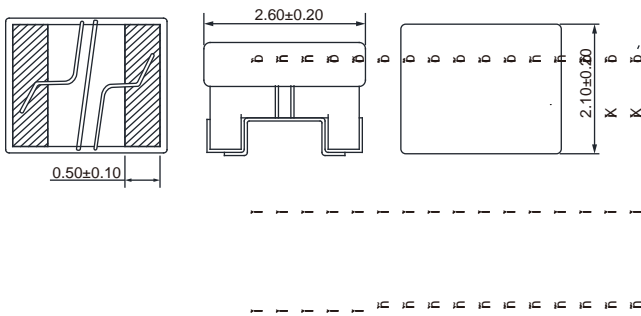


Electrical Properties:

Inductance (μH)	Q	SRF (MHz)	Tolerance (%)					
3.3	100	FK						
6.8	100	±5%						
8.2	100	±5%						
10	100	±5%						
10	100	±2%						
12	100	±5%						
12	100	±2%						
15	100	±5%						
15	100	±2%						
18	100	±5%						
18	100	±2%						
22	100	±5%						
22	100	±2%						
27	100	±5%						
27	100	±2%						
33	100	±5%						

Typical Electrical Characteristics:

Inductance VS. Frequency Characteristics:

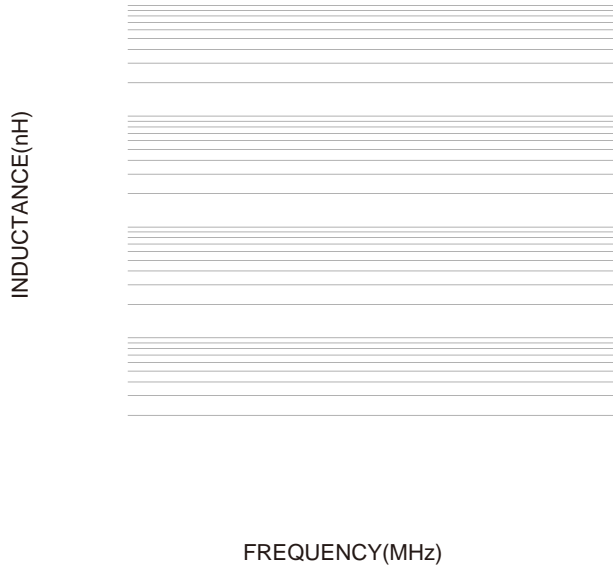

Temperture Rise VS. Frequency Characteristics:

